


WATER

PRODUCT CATALOGUE 2022

INTRODUCTION

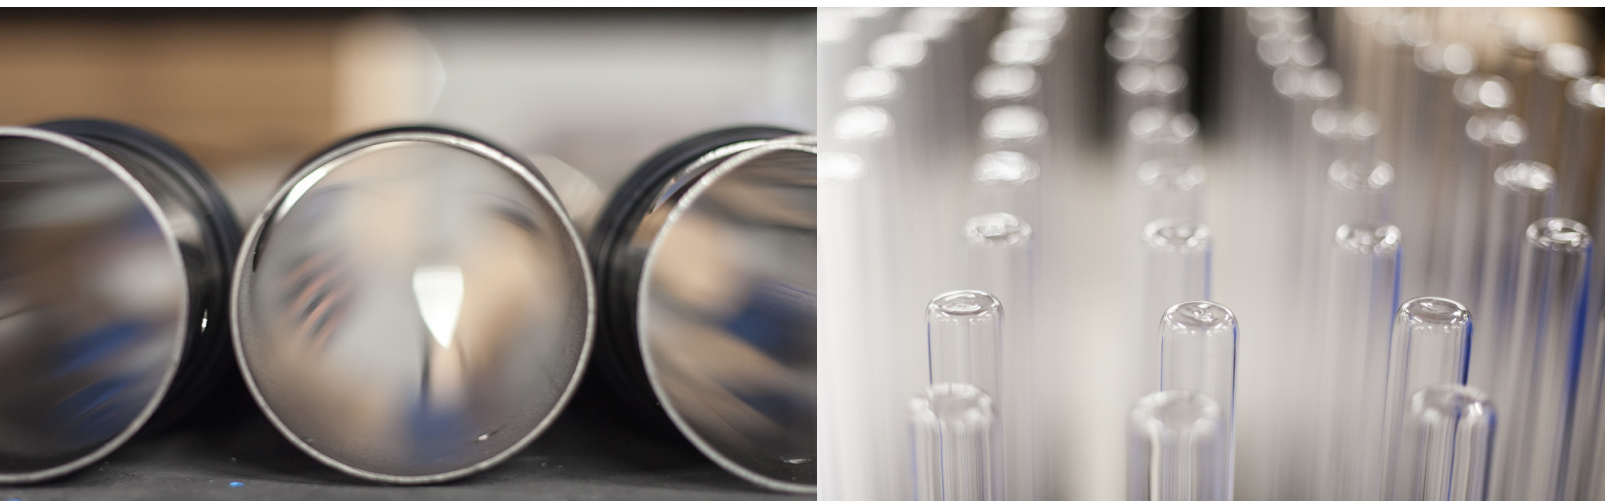

WELCOME

A pond means life in your garden. To make the life of your pond's flora and fauna the best as possible, it is required to keep the water in perfect condition and balance. To ensure this, you have to rely on your filter technology every day.

The Xclear UV-C disinfection systems and pond equipment and supplies are the best solutions for keeping your pond water healthy and crystal clear. From a professional koi pond to a "do it yourself" pond; Xclear pond products are applicable for every situation.

Xclear is a trademark of VGE B.V. located in the south of the Netherlands. Almost 40 years of experience (since 1982) resulted in high quality and innovative products for the pond, pool and industrial market. At VGE headquarters, Xclear products are designed, produced and assembled. A team of professional product specialists are in contact with customers in more than 70 countries worldwide.

Innovation is of paramount importance to VGE B.V. Therefore, the company has its own product development department, which regularly introduces new products and product improvements. Innovative thinking is one of our main strengths. VGE develops products which are customized to today's pond trends and customer needs.

The successful Xclear product range is also available for private labeling. Please contact our sales department for details.

CONTACT:

VGE B.V.

Nieuwe Eerdsebaan 26
5482 VS Schijndel
The Netherlands

T: +31 (0) 88 222 1999
info@vgebv.nl
www.vgebv.com

FOR MORE INFORMATION:

 www.xclear.nl
 www.facebook.com/vgebv
 www.linkedin.com/company/vge-bv

UV-C DISINFECTION 4

UV-C DISINFECTION SYSTEMS 6 - 17

Economy UV-C Professional UV-C	6
Ultraflex UV-C Professional UV-C Ø110	7
Flex UV-C Tech UV-C	8
Jumbo Tech UV-C 130W Amalgam	9
Immersion UV-C Inox UV-C	10
Module UV-C	11
AOP Compact Ozone + UV-C HP	12
VGE Pro	13

UV-C LAMPS 19 - 21

UV-C lamps	19
TL Lamps T5 & T6 Lamps	20
PL Lamps Unit Specific Lamps	21

POND EQUIPMENT AND SUPPLIES 23 - 27

Threaded Tank Connector Tank Connector (Aerated) Bottom Drain	23
Slide Valve Pre-Filter	24
Fish Feeder	25
ProfiHeater Anti Algae Copper Electrolyzer Static Mixer	26
Bio Balls Bio Blocks Flow Switch Plus	27

XCLEAR PROMOTIONAL ACTIVITIES 28

PRIVATE LABEL 29

SPARE PARTS 31 - 38



SALTWATER

Our special UV resistant saltwater housing is highly resistant to corrosive water and therefore very suitable for salt water applications.



STAINLESS STEEL HOUSING

A stainless steel interior provides a reflection of UV radiation and this increases the efficiency of the radiation by up to 35%. In addition, the stainless steel ensures a longer life of the housing.



ALUMINIUM HOUSING OR INTERIOR

An aluminium housing or coating on the inside provides a reflection of the UV-C radiation and this increases the efficiency of the radiation by up to 35%.



ONLY POND PRO

The product is only intended for professional use. It should be installed in a professional application or assembled with other appliances.

UV-C DISINFECTION

UV-C TREATMENT

Over 100 years ago German scientists discovered that the top surface of lake-water was sterile when exposed to sunlight. Investigation led to the discovery of Ultraviolet light. Situated in the electromagnetic spectrum between X-rays and visible light, Ultraviolet (UV) light has many beneficial properties. UV light is split into four main categories, UV-A, UV-B, UV-C and Vacuum UV. The UV-C spectrum (200 to 280 nanometers) is the most lethal range of wavelengths for microorganisms. This range, with 254 nanometers being the peak germicidal wavelength, is known as the Germicidal Spectrum. UV-C light has the ability to cause permanent damage to a wide variety of nuisance microorganisms in water.

THE TARGETED MICROORGANISM


Each type of microorganism requires a specific UV-C radiation exposure rate to successfully complete the disinfection process. The targeted microorganism must be directly exposed to the UV-C radiation long enough for the radiation to penetrate the microorganism's cell wall. However, it takes only seconds for UV-C light rays to inactivate waterborne microorganisms by breaking through the microorganism's cell wall and disrupting their DNA. This often totally destroys the organism, or at the very least will impair its ability to reproduce.

UV-C LAMP LIFESPAN

TL-, PL- and T5 UV-C lamps have an average lifespan of minimal 9000 hours (± 1 year). After that the lamp will still function, but for less than 80% and the strength is too low to kill algae and bacteria. Amalgam lamps have a lifespan of 16000 hours.

UV-C BENEFITS

- The solution against green pond water
- UV-C is effective against all microorganisms
- Improved water quality
- A crystal clear pond
- Protects fish from germs and harmful micro-organisms
- Less energy and maintenance costs
- No harmful chemicals required
- UV-C is a non-hazardous, green technology
- Cannot be overdosed

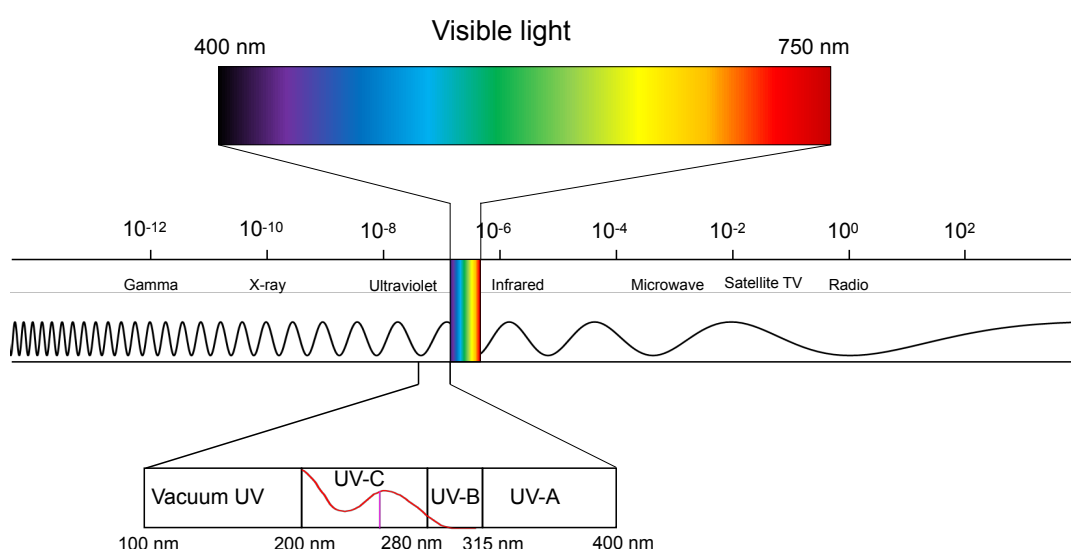

UV-C DISINFECTION SYSTEMS

A UV-C disinfection system is indispensable to any pond. UV-C Light ensures healthy circumstances of flora and fauna in and around the pond. Next to being highly efficient against floating algae, UV-C makes sure that harmful bacteria and other microorganisms are rendered harmless which ensures a clear and healthy pond. The user-friendly range of Xclear UV-C disinfection systems is the solution for these common pond problems. The wide range of Xclear UV-C is thoughtfully designed and tested with a strong focus on low-maintenance, safe and easy to apply pond solutions.

Item No.	Type	Weight (kg)	Length (cm)	Width (cm)	Height (cm)	Quantity full pallet	EAN
XE01052	Economy UV-C 5 W	1,4	31	23	11	100	8714404009089
XE01092	Economy UV-C 9 W	1,5	31	23	11	100	8714404009157
XE01112	Economy UV-C 11 W	1,6	31	23	11	100	8714404009010
XE03752	Ultraflex UV-C 75 W	3	100	28	12	30	8714404044172
XH01182	Professional UV-C 18 W	3,1	60	25	11	54	8714404037730
XH01362	Professional UV-C 36 W	3,8	55	33	12	40	8714404037808
XH01552	Professional UV-C 55 W	4,2	99	28	12	40	8714404037877
XE04402	Flex UV-C 40 W	3,2	77	21	13	60	8714404042802
XE04752	Flex UV-C 75 W	3,2	77	21	13	60	8714404042819
XE05402	Tech UV-C 40 W	3,5	77	18	13	60	8714404039116
XE05752	Tech UV-C 75 W	3,9	77	18	13	60	8714404039123
XH04402	Jumbo Tech UV-C 40 W	4,4	99	28	12	30	8714404034869
XH04752	Jumbo Tech UV-C 75 W	4,7	99	28	12	30	8714404034791
XH06132	130 W Amalgam UV-C with flow switch	4,9	99	28	12	30	8714404030052
XH07752	Professional UV-C Ø 110 T5 75 W	5,1	103	27	14	24	8714404004398
XH07132	Professional UV-C Ø 110 Amalgam 130 W	7,1	103	27	14	24	8714404004466
XP02752	Inox UV-C 75 W	11,2	105	26	18	18	8714404038539
XP02132	Inox UV-C 130 W Amalgam	11,6	105	26	18	18	8714404038546
XP08402	Xclear Module UV-C 40W Amalgam	-	58	26	12	-	8714404979863
XP08802	Xclear Module UV-C 80W Amalgam	-	58	26	12	-	8714404979726
XP09402	Xclear Module UV-C 40W Amalgam Signal	-	58	26	12	-	8714404979658
XP09802	Xclear Module UV-C 80W Amalgam Signal	-	58	26	12	-	8714404979580
XH09752	AOP Compact Ozone + UV-C High Pressure	7	101	27	15	24	8714404037594
XH08752	AOP Compact Ozone + UV-C Low Pressure	15,1	116	42	17	14	8714404035705
XH12752	AOP Compact Ozone + UV-C Saltwater Low Pressure	13,8	116	42	17	14	8714404987271
5056594N	Dosatech	1,2	32	10	20	120	8714404046206
3300029	Anti Algae Copper Electrolyzer	2,3	54	25	11	40	8714404039093
6051800N	Automatic Fish Feeder	3	58	58	47	32	8714404033688

UV-C DISINFECTION SYSTEMS

ECONOMY UV-C



The Economy UV-C is designed for small ponds.

- Keeps your pond clear and your fish healthy.
- Including hose connectors 1" – 25/20/15.
- Friendly price range.
- Suitable for saltwater applications.



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Pressure
XE01052	Economy UV-C 5W	5 Watt PL-S	2.500 L	1.500 L/h	1 Bar
XE01092	Economy UV-C 9W	9 Watt PL-S	7.000 L	3.000 L/h	1 Bar
XE01112	Economy UV-C 11W	11 Watt PL-S	10.000 L	5.000 L/h	1 Bar

PROFESSIONAL UV-C



The Professional UV-C is equipped with high-quality components combined with a Philips PL UV-C lamp.

- Guaranteed maximum performance and durability.
- Stainless steel body for maximum durability.
- These disinfection systems come with 63mm PVC connection fittings with adaptors to 50mm/1½" fem. threading.
- These disinfection systems come with hose connectors 1½" – 40/32/25mm.



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Pressure
XH01182	Professional UV-C 18W	18 Watt PL-L	15.000 L	6.000 L/h	2 Bar
XH01362	Professional UV-C 36W	36 Watt PL-L	35.000 L	10.000 L/h	2 Bar
XH01552	Professional UV-C 55W	55 Watt PL-L	55.000 L	15.000 L/h	2 Bar

PROFESSIONAL UV-C Ø110



The Professional UV-C is the best solution to reduce head pressure losses.

- 110mm connections.
- 110mm diameter stainless steel body for maximum durability.
- Ideal for gravity systems.
- Ideal in combination with low pressure pumps.
- Available with a Philips T5 or T6 amalgam lamp for optimal performance.
- 130 Watt amalgam has a flow switch to switch off the lamp when there is no water flow.



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Press.
XH07752	Professional UV-C Ø110 75W	75 Watt T5	75.000 L	20.000 L/h	2 Bar
XH07132	Professional UV-C Ø110 130W	130 Watt T6 Amalgam	130.000 L	40.000 L/h	2 Bar

ULTRAFLEX UV-C



The UltraFlex UV-C is extremely suitable for installing the disinfection system with total flexibility.

- Provides 360° installation possibilities.
- Less pressure loss because of straight connection.
- Including 63mm PVC unions with adaptors to 50mm/1½" fem. threading.
- This disinfection system comes with hose connectors 1½" – 40/32/25 mm.



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Pressure
XE03752	Ultraflex UV-C 75W	75 Watt T5	70.000 L	20.000 L/h	2 bar

UV-C DISINFECTION SYSTEMS

FLEX UV-C



With 4 connections!

The Flex UV-C is an excellent solution when multiple flexible installation options are required.

- Multiple installation options thanks to the connection options.
- Including 63mm PVC connection fittings with adaptors to 50mm/1½" fem. threading.
- Including hose connectors 1½" – 40/32/25mm.
- The length of the disinfection system is only 85cm.



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Press.
XE04402	Flex UV-C 40W	40 Watt T5	40.000 L	20.000 L/h	2 bar
XE04752	Flex UV-C 75W	75 Watt T5	75.000 L	25.000 L/h	2 bar

TECH UV-C



Because of its short length and compact size, the Tech UV-C is ideal for filter installations where space is limited but a high disinfection efficiency is needed.

- Easy to install.
- Equipped with a 40 watt or 75 watt T5 UV-C lamp.
- Stainless steel body for maximum durability.
- Competitively priced.
- Including 63mm PVC connection fittings with adaptors to 50mm/1½" fem. threading
- Including hose connectors 1½" – 40/32/25mm.
- The length of the disinfection system is only 85cm.



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Press.
XE05402	Tech UV-C 40W	40 Watt T5	40.000 L	20.000 L/h	2 Bar
XE05752	Tech UV-C 75W	75 Watt T5	75.000 L	25.000 L/h	2 Bar

JUMBO TECH UV-C

The Jumbo Tech UV-C disinfection system is designed for ponds where a guaranteed contact time with UV-C is necessary.

- High intensity disinfection performance.
- 85 Centimeter lamp for longer contact time with UV-C light.
- Stainless steel body for maximum durability.
- Including 63mm PVC connection fittings with adaptors to 50mm/1½" fem. threading
- The length of the disinfection system is 95cm.



LightTech

STAINLESS
STEEL

35%
REFLECTION



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Pressure
XH04402	Jumbo Tech UV-C 40W	40 Watt Tech T5	40.000 L	20.000 L/h	2 Bar
XH04752	Jumbo Tech UV-C 75W	75 Watt Tech T5	75.000 L	25.000 L/h	2 Bar

130W AMALGAM UV-C WITH FLOW SWITCH

The 130 watt amalgam UV-C disinfection systems are suitable for environments where consistency of powerful radiation is required at all times.

- Including a flow switch to switch off the lamp when there is no water flow.
- Equipped with a high-quality 130W Philips amalgam lamp
- Amalgam lamps are less affected by temperature fluctuations in the water.
- Generates a constant, powerful radiation.
- Stainless steel body for maximum durability.
- Including 63mm PVC connection fittings with adaptors to 50mm/1½" fem. threading.



PHILIPS
TUV Lamps
Water disinfection

STAINLESS
STEEL

35%
REFLECTION



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Press.
XH06132	130W Amalgam UV-C incl. flow switch	130 Watt Amalgam	130.000 L	30.000 L/h	2 Bar

UV-C DISINFECTION SYSTEMS

INOX UV-C



ONLY
POND
PRO

The Innox UV-C disinfection system is the driving force for large (professional) pond installations.

- Ability to keep large ponds free of algae, bacteria and fungi.
- Designed to connect easily in large (professional) filter installations.
- Full 316L stainless steel body for maximum performance and durability.
- Equipped with a high quality Philips UV-C lamp.
- Including a flow switch to switch off the lamp when there is insufficient water flow.
- Generates a constant, powerful radiation.
- Integrated timer accurately monitors the number of operating hours.
- Lamp replacement indication.
- The length of the disinfection system is 100cm.
- 114mm diameter.
- 2" male threaded connections.



Item No.	Type	UV-C Lamp	Pond volume	Max. flow	Max. Press.
XP02752	Innox UV-C 75W	75 Watt T5	75.000 L	20.000 L/h	5 Bar
XP02132	Innox UV-C 130W	130 Watt T6 Amalgam	130.000 L	40.000 L/h	5 Bar

IMMERSION UV-C



ONLY
POND
PRO

Submersible UV-C lamps have a big advantage compared to conventional UV-C units: no pressure loss.

- These lamps can be used in filter tanks so the water can pass without any resistance/pressure loss.
- The plastic end of the lamp has a 32mm diameter so you can use 32mm pipe clips to mount the lamp in a tank.
- A special tank connector is available for direct installation in i.e. filters (see picture).

NOTE:



- This product is only intended for professional use.
- It should be installed in a professional application or assembled with other appliances.
- Before using this product the installer/user must take care that the product complies to the latest local applying standards for UV-C units.



Item No.	Type	UV-C Lamp
XP01402	Immersion UV-C 40W	40 Watt T5
XP01752	Immersion UV-C 75W	75 Watt T5
XP01402.1	Immersion UV-C 40W Amalgam	40 Watt Amalgam T5
XP01802	Immersion UV-C 80W Amalgam	80 Watt Amalgam T5
7201269	Tank connector 1½"	-

MODULE UV-C

ONLY
POND
PRO

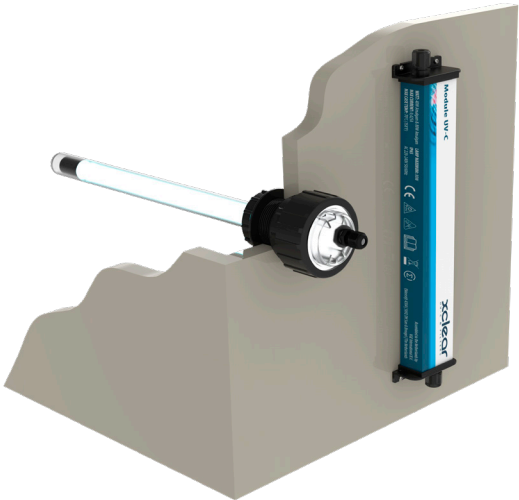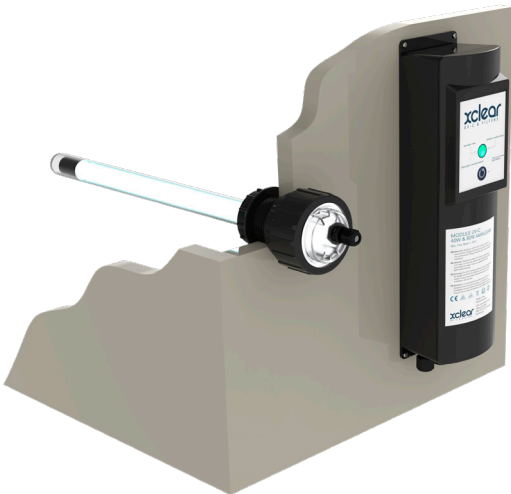

The Module UV-C is our latest addition of UV-C disinfection systems with one big advantage: no pressure loss.

- These lamps can be used in filter tanks so the water can pass without any resistance/pressure loss.
- The unit is very easy to install.
- The transparent lamphead makes it easy to see if the lamp is turned on or off.
- A special tank connector is available for direct installation in i.e. filters (see picture).
- The Signal control unit comes with a visual indication when to replace the lamp.

NOTE:

- This product is only intended for professional use.
- It should be installed in a professional application or assembled with other appliances.
- Before using this product the installer/user must take care that the product complies to the latest local applying standards for UV-C units.
- There are two choices for control units.



Item No.	Type	UV-C Lamp
XP08402	Xclear Module UV-C 40W Amalgam	40W Amalgam
XP08802	Xclear Module UV-C 80W Amalgam	80W Amalgam
XP09402	Xclear Module UV-C 40W Amalgam Signal	40W Amalgam
XP09802	Xclear Module UV-C 80W Amalgam Signal	80W Amalgam

UV-C DISINFECTION SYSTEMS

AOP COMPACT OZONE + UV-C HIGH PRESSURE



TIP: The expected life-span of the T5 lamp regarding UV-C is 9000 hrs. After this period of time the intensity decreases. When you replace the lamp in March there will be enough ozone-production for a whole year!

- Including Venturi system and UV-C/Ozone combination lamp.
- No residual ozone left in the water flowing out.
- Reduces pathogens.
- Reduces algae growth.
- Removes organic matter.
- Removes yellow colorants in the water.
- Supports the performance of biological filters.
- Reduces ammonia level.
- Reduces nitrite level.
- Including 63mm PVC connection fittings with adaptors to 50mm/1½" fem. threading.

The AOP Compact Ozone + UV-C HP is the ideal unit to combine ozone and Tech UV-C technology.

OPERATION

This revolutionary combination of ozone and UV-C makes it possible to achieve an unbelievably clear pond! With this Xclear AOP Compact Ozone & UV-C unit connected to your pond system you are able to keep your water fresh, crystal clear and especially hygienic clean. You connect the Xclear AOP Compact Ozone & UV-C to your pond system. Using a pump, the water is pumped into the unit through the supplied reactor. Because of the water pressure in the reactor, air is sucked through the venturi system. Air is sucked into the unit via the air valve and flows through the area between the quartz sleeve and the AOP Compact Ozone & UV-C lamp. Because air enters the unit via the lamp, it becomes loaded with ozone that was generated by the special AOP Compact Ozone & UV-C lamp, which produces 0.6 grams of ozone. After it has passed the ball valve, the ozone enriched air is then mixed with water in the reactor. The oxidation and disinfection take place here, and a powerful disinfection process is achieved. The water ozone mixture is then exposed to the UV-C radiation of the lamp. The UV-C breaks down the remaining ozone in the water, changing it into OH- (Hydroxyl radicals) which have a very high oxidation potential for extra clarity of your water.





Item No.	Type	Ozone UV-C Lamp	Pond volume	Max. flow	Max. Press.
XH09752	AOP Compact Ozone + UV-C HP	75 Watt	50.000 L	25.000 L/h	2 Bar

The Advanced Oxidation Process (AOP) combines the benefits of ozone and UV-C into one device. When ozone is used in combination with UV-C light in water, hydroxyl radicals ($\bullet\text{OH}$) are created. These radicals are very effective against germs, bacteria and organic pollutants. Because UV-C light will destroy the residual ozone in the water, no deozonation device is required. AOP is a very effective and efficient way of sanitizing and disinfecting your pond.

BENEFITS AOP:

- Strong combination of ozone (oxidation) and UV-C (disinfection).
- Improves the disinfection efficiency.
- Can be added quickly to existing filtration systems.

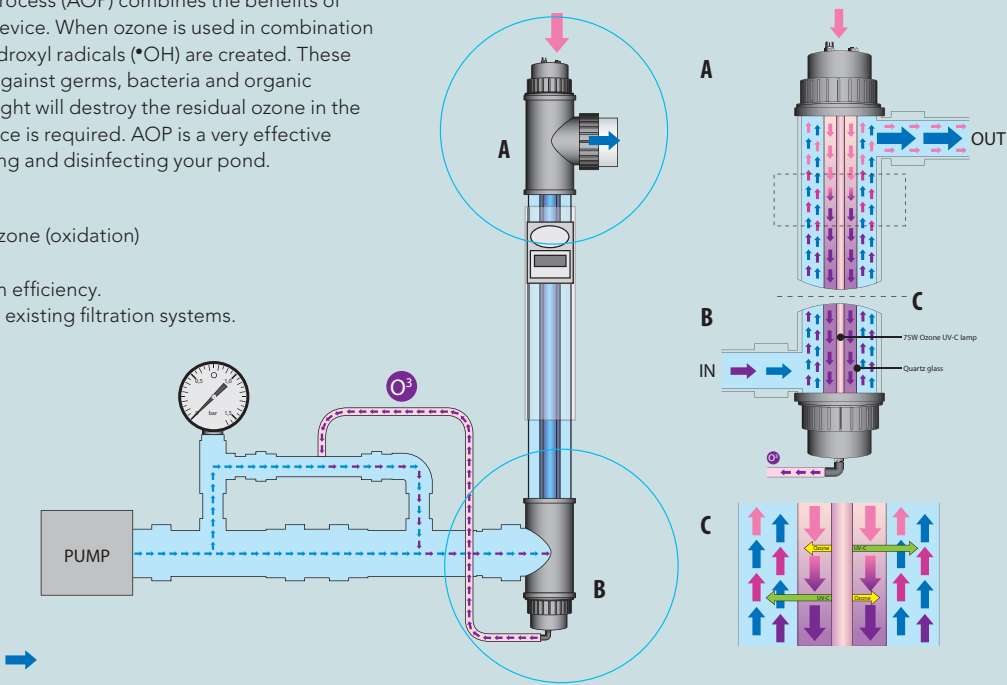

VGE PRO UV SYSTEM

For high volumes and professional applications VGE B.V. offers UV-C disinfection solutions under the brand name VGE Pro. VGE Pro UV-C disinfection solutions are the finishing touch in a water treatment installation; they have the ability to keep the water free of bacteria, viruses, algae and fungi. It is essential that the UV-C disinfection system seamlessly connects to the design and the components used in the water treatment installation. By choosing VGE Pro, you choose guaranteed quality for a fair price.

APPLICATIONS

The VGE Pro UV-C solutions are suitable for different applications; are suitable for a wide range of applications including professional ponds, aquaculture, proceswater and much more.

VGE Pro delivers modular systems tailored to the sector in question. We build our systems starting with a high-quality base. By serving as a partner rather than just a supplier we create solutions and develop a system that fits the needs of your installation.

REACTORS INOX

The high quality 316L stainless steel reactor of the VGE Pro INOX series have been designed to perform. After the high quality welding process the units are leak tested. After this process they get a pickling and passivation treatment which drastically improves the corrosion resistance and lifetime of the unit. Another last treatment with glass pearls (shot peening) gives the units a nice, matt grey surface.

HDPE

The high quality HDPE reactors of VGE Pro HDPE series have been designed to treat highly corrosive water. They are suited for all kinds of disinfection and UV-C treatment applications and can even be used to treat warm tropical seawater.

SMART PIN TECHNOLOGY

The VGE Pro UV-C Low Pressure disinfection systems are equipped with the unique Smart Pin Technology (SPT). This innovative system is a reliable way to integrate the UV-C lamp(s) in a safe, efficient and smart way in a reactor. The SPT makes it possible to replace the lamp safely, although the system is filled with water and pressurized.

BENEFITS

- Prevents the release of harmful UV-C radiation.
- Changing the UV-C lamp with water in the system.
- Resistant to corrosion.
- Splash proof.
- Visual inspection for operation of the lamp.
- Clamping system for optimal seal function.
- Lamp replacement without tools.



VGE PRO CONTROL UV UNITS

Low pressure

The Basic version is suited with an electronic ballast to drive the lamp(s). The Control Timer has additionally a LED display for showing the operational lamp hours. The Control Monitor has a colour display and an optional UV sensor can be connected for monitoring the treatment process. The most complete control panel is the Control Monitor Plus. A UV sensor, temperature sensor and a flowswitch can be connected and the control unit has alarm and warning functions build in.

Medium pressure

The compact version is suited with an electronic ballast, a LED lamp life indication and flow switch contact. The comfort version is PLC controlled with a membrane keyboard and can be connected to a UV intensity sensor, Pt100 chamber temperature sensor an/or can be controlled and monitored via a ModBus connection.



Low pressure control units



Medium pressure control units

MEDIUM PRESSURE LAMP UV SYSTEMS

A Medium Pressure UV system is always composed of a UV irradiation chamber and a control panel. The irradiation chamber is provided with one medium pressure UV lamp which combines a compact design with a high lamp power. An inline design of the irradiation chamber has been chosen with a UV lamp placed perpendicular to the direction of the flow. This in order to obtain good irradiation of the water in combination with a very low hydraulic pressure loss. The choice of the irradiation chamber and the UV lamp type is tailored to the application in order to realize a reliable irradiation of the water with the least possible loss of pressure.



BENEFITS INOX UV

The high quality 316L stainless steel reactor of the VGE Pro INOX series have been designed to perform. After the high quality welding process the units are leak tested. After this process they get a pickling and passivation treatment which drastically improves the corrosion resistance and lifetime of the unit. Another last treatment with glass pearls (shot peening) gives the units a nice, matt grey surface.

- High corrosion resistance
- Leak tested
- Easy to install
- UV radiation reflection



Model	Shape	Max. Pressure [bar]	Capacity ¹ [m³/h]	N. of lamps	Power [kW]
40-76	L	6	3	1 x 40 W	0,05
75-76	L	6	6	1 x 75 W	0,08
140-76	U	6	12	1 x 140 W	0,16
200-76	U	6	17	1 x 200 W	0,23
75-114	U	6	10	1 x 75 W	0,08
140-114	U	6	20	1 x 140 W	0,16
200-154	U	6	38	1 x 200 W	0,23
420-168	U	6	78	3 x 140 W	0,47
400-204	U	6	92	2 x 200 W	0,45
600-219	U	6	140	3 x 200 W	0,68
975-306	L	6	306	3 x 325 W	1,11
1950-306	L	6	600	6 x 325 W	2,21

(1) Capacity based on 400 J/m², T10 mm @ 254 nm = 98 %, MPSSM-average intensity (max. flow speed of 3 m/s not taken into account)

BENEFITS HDPE UV

The high quality HDPE reactors of VGE Pro HDPE series have been designed to treat highly corrosive water. Besides that, HDPE is resistant to UV radiation. They are suited for all kinds of disinfection and UV-C treatment applications and can even be used for the production of ultrapure water, semiconductor-, pharmaceutical- and cosmetic industry.

- UV radiation resistant
- Suitable for corrosive water
- Easy to install
- Leak tested



Model	Shape	Max. Pressure [bar]	Capacity ¹ [m³/h]	N. of lamps	Power [kW]
75-110	U	6	10	1 x 75 W	0,08
140-110	U	6	17	1 x 140 W	0,16
200-110	U	6	23	1 x 200 W	0,23
200-160	U	6	35	1 x 200 W	0,23
400-200	U	6	83	2 x 200 W	0,45
600-225	U	6	124	3 x 200 W	0,68
975-315	U	4	278	3 x 325 W	1,11
1950-315	U	4	544	6 x 325 W	2,21

(1) Capacity based on 400 J/m², T10 mm @ 254 nm = 98 %, MPSSM-average intensity (max. flow speed of 3 m/s not taken into account)

What makes the VGE Pro UV-C systems unique?

- VGE Pro UV-C units are equipped with a 316L Stainless Steel reactor or a high quality HDPE reactor.
- Lamp (re)placement while unit is pressurised.
- Each unit is equipped with transparent parts to monitor the UV-C lamp.
- VGE Pro units can be equipped with a UV-C sensor and/or watertemperature sensor.
- VGE Pro units are equipped with the unique Smart Pin Technology (SPT) (patented technology) for easy and safe lamp (re)placement without disconnecting electrical connection.
- Low pressure amalgam lamps for high performance levels, irrespective of the temperature of the water.
- Extreme high quality lamps with a lifetime up to 16.000 hours!
- Single systems can handle flows ranging from 0,5 m³/h up to 550 m³/h.
- Customization of the device to your own specifications possible.

VGE Pro INOX

MODEL	REACTOR SHAPE	MAX. PRESSURE	CONNECTION	CAPACITY ⁽¹⁾
		[BAR]		[M³/H]
400-54	Z	6	1"	18
40-76	L	6	3/4"	3
75-76	L	6	3/4"	6
140-76	U	6	2"	12
200-76	U	6	2"	17
75-114	U	6	2"	10
140-114	U	6	2"	20
200-154	U	6	DN65	38
420-168	U	6	3"	78
400-204	U	6	DN100	92
600-219	U	6	DN125	140
975-306	L	6	DN250	306
1950-306	L	6	DN250	600

VGE Pro HDPE

MODEL	REACTOR SHAPE	MAX. PRESSURE	CONNECTION	CAPACITY ⁽¹⁾
		[BAR]		[M³/H]
75-110	U	6	2"	10
140-110	U	6	2"	17
200-110	U	6	2"	23
200-160	U	6	DN65	35
400-200	U	6	DN100	83
600-225	U	6	DN125	124
975-315	U	2	DN250	278
1950-315	U	2	DN250	544

VGE Pro INOX 3S/3L

MODEL	REACTOR SHAPE	MAX. PRESSURE	CONNECTION	CAPACITY ⁽¹⁾
		[BAR]		[M³/H]
3S	L	6	3/4"	2,7
3L	L	6	3/4"	5,7

VGE Pro Medium Pressure


MODEL	REACTOR SHAPE	MAX. PRESSURE	CONNECTION	CAPACITY ⁽¹⁾
		[BAR]		[M³/H]
Multimax	I	10	2"	13,3
600-85	I	10	DN80	18,7
1200-85	I	10	DN80	38,5

(1) Capacity based on 400 J/m², T10 mm @ 254 nm = 98 %, MPSSM-average intensity
(max. flow of 3 m/s not included)

UVC Germicidal Lamps

Global Leaders

Light Sources and Lighttech, global leaders in UVC Germicidal Lamps, offer unmatched innovation in the design and manufacture of our lamp products. With both of our state of the art manufacturing facilities, we can supply the world market with high-quality standard lamp designs as well as custom designed lamp solutions for your specific applications.

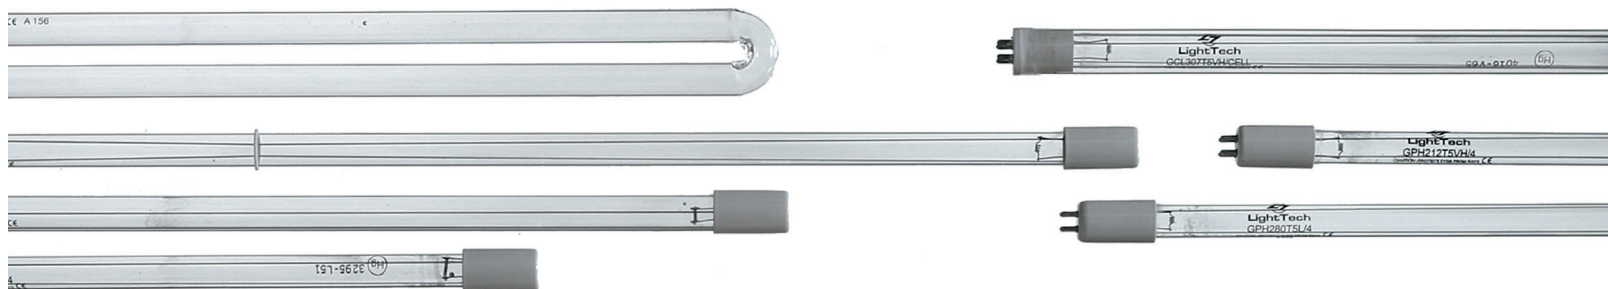

- Amalgam Lamps
- Soft Glass
- U Shaped
- Cell Lamps
- Compact Lamps
- Standard Output
- High Output
- Ozone Producing
- Medium Pressure (MPUV/MPHO)
- OEM - Proprietary Base Solutions
- Custom Lamp Configurations

UV-C LAMPS

UV-C LAMPS

The lamps in a UV-C disinfection system should be replaced periodically for optimal disinfection performances. To replace these lamps, VGE B.V. has a wide range of high quality UV-C lamps for nearly all UV-C disinfection systems. For the professional market it's also possible to deliver special high quality lamps with a higher wattage. For example lamps of 325 and 400 watt. Please contact us by e-mail: info@vgebv.nl for the actual prices and delivery times.



PL-S LAMPS are compact UVC (germicidal) lamps used in residential water and air disinfection units. The compact size of the lamp allows for a small system design and design flexibility. Thanks to the single-ended lamp base, lamp replacement is easy.



T5 LAMPS are single ended UVC (germicidal) lamps used in professional water and air disinfection units. The small 16 mm diameter of the lamp allows for a small system design and design flexibility. T5 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficiency.



PL-L LAMPS are compact UVC (germicidal) lamps used in water and air disinfection units. The compact size of the lamp allows for a small system design and design flexibility. Thanks to the single-ended lamp base, lamp replacement is easy.



PHILIPS SMART CAP technology is a development for optimal safety! The lamp foot and the fitting, that goes into the housing of the lamp, are both provided with a safety switch. As soon as the lamp is taken out of the housing, the power supply is interrupted causing the lamp to switch off. This guarantees optimal safety during maintenance.



TL MINI LAMPS are slim double-ended UVC (germicidal) lamps used in residential water and air disinfection units. The small 16 mm diameter of the lamp allows for a small system design and design flexibility.



T6 are single ended UV-C (germicidal) lamps used in professional water and air disinfection units. The 19 mm diameter of the lamp allows for a small system design and design flexibility. T6 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficiency. The T6 is mostly used in the amalgam version.



TL LAMPS are double-ended UVC (germicidal) lamps used in professional air disinfection units. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.



VGE SMART PIN TECHNOLOGY
SPT makes it possible to replace the lamp safely, while the system remains filled with water. If the lamp is not turned off during the replacement, it will switch off automatically as soon as it is removed from the socket. Due to the seal between the lamp socket and lamp, the system can be used in situations where IPx4 is required. The high-quality ceramic is an excellent electrical isolator and is resistant to corrosion. A visual observation of the operation of the lamp is no problem through various transparent parts.

UV-C LAMPS

TL BULBS

ITEM NR.	BRAND	MODEL	BOX	TYPE	BASE
3903557	Philips	TUV TL-MINI 6W FAM	25	TL	I
3903558	Philips	TUV TL-MINI 8W FAM	25	TL	I
3903559	Philips	TUV TL 10W 1SL T8	25	TL	I
3903563	Philips	TUV TL-MINI 11W FAM	25	TL	I
3903560	Philips	TUV TL 15W 1SL T8	25	TL	I
3903574	Philips	TUV TL-MINI 16W	25	TL	I
3903561	Philips	TUV TL 25W 1SL T8	25	TL	I
3903564	Philips	TUV TL 30W 1SL T8	25	TL	I
3903565	Philips	TUV TL 36W SLV	6	TL	I
3903562	Philips	TUV TL 55W 1SL HO T8	6	TL	I
3903570	Philips	TUV TL 75W HO T8	6	TL	I
3903071	VGE	TL 30W T8	25	TL	I
3903072	VGE	TL 55W T8	25	TL	I

T5 & T6 BULBS

ITEM NR.	BRAND	MODEL	BOX	TYPE	BASE
E800900	Philips	TUV 16W 4P-SE UNP	1	T5	C
E800901P	Philips	TUV 36T5 40W 4P-SE	1	T5	C
E800902P	Philips	TUV 36T5 HO 75W 4P-SE	1	T5	C
3903567	Philips	TUV 64T5 75W 4P-SE (1.56m)	1	T5	C
B280005	Philips	TUV Smart Cap 75W	1	T5	D
B280006	Philips	TUV Smart Cap 40W	1	T5	D
E800904	Philips	TUV XPT 130W 4P-SE Amalgam	1	T6	E
3903022	LightTech	T5 11W 4P-SE	1	T5	C
E800901L	LightTech	T5 40W 4P-SE	1	T5	C
E800902L	LightTech	T5 75W 4P-SE	1	T5	C
F980005	LightTech	T6 130W 4P Amalgam	1	T6	E
3903025	VGE - LightTech	T6 325W 4P-SE Amalgam	1	T6	E
F980115	LightTech	T6 200W 4P Amalgam	1	T6	E
4800070AM	VGE - LightTech	T5 40W 4P Amalgam	1	T5	C
4800082AM	VGE - LightTech	T5 80W 4P Amalgam	1	T5	C
3903073	VGE	4P-SE 40W T5	25	T5	C
3903074	VGE	4P-SE 75W T5	25	T5	C



PL BULBS

ITEM NR.	BRAND	MODEL	BOX	TYPE	BASE
3903005	Philips	TUV PL-S 5W /2P	10	PLS-S	A
3903009	Philips	TUV PL-S 7W /2P	10	PLS-S	A
3903010	Philips	TUV PL-S 9W /2P	10	PLS-S	A
3903013	Philips	TUV PL-S 9W /4P	10	PLS-S	-
3903020	Philips	TUV PL-S 11W /2P	25	PLS-S	A
3903030	Philips	TUV PL-L 18W /4P	25	PL-L	B
3903033	Philips	TUV PL-L 24W /4P	25	PL-L	B
3903040	Philips	TUV PL-L 36W /4P	1	PL-L	B
3903050	Philips	TUV PL-L 55W /4P	1	PL-L	B
B212012	Philips	Replacement module 12W 230V	1	PL-S	J
B212012 USA	Philips	Replacement module 15W 120V	1	PL-S	J
4610007	Philips	TUV PL-L 60W /4P	1	PL-L	B
3903095	Philips	TUV PL-L 95W /4P	1	PL-L	B
3903006	VGE	PL-S 5W 2P	20	PL-S	A
3903011	VGE	PL-S 9W 2P	20	PL-S	A
3903021	VGE	PL-S 11W 4P	20	PL-S	A
3903034	VGE	PL-L 18W 4P	25	PL-L	B
3903037	VGE	PL-L 24W 4P	25	PL-L	B

UNIT SPECIFIC LAMPS

ITEM NR.	BRAND	MODEL	BOX	TYPE	BASE
F980065	VGE - LightTech	T5 16W 4P-SE	1	T5	G
F980068	VGE - LightTech	T5 40W 4P-SE, length 365mm (short)	1	T5	F
F980002	VGE - LightTech	T5 40W 4P-SE	1	T5	F
F980004	VGE - LightTech	T5 75W 4P-SE	1	T5	F
F980078BU	VGE - LightTech	T5 40W 4P-SE	1	T5	F
F980079BU	VGE - LightTech	T5 75W 4P-SE	1	T5	G
4800033	VGE - LightTech	T5 75W 4P-SE Ozone	1	T5	H
F980008	VGE - LightTech	T6 130W Amalgam 4P	1	T6	M
F980010	VGE - LightTech	T5 80W 4P	1	T5	X
F980020	VGE - LightTech	T6 140W Amalgam 4P	1	T6	X
F980120	VGE - LightTech	T5 21W 4-	1	T5	G
B280002	Blue Lagoon - LightTech	T5 40W Ionizer, length 635mm (short)	1	T5	K
B280001	Blue Lagoon - LightTech	T5 75W Ionizer, length 645mm (short)	1	T5	K
F980086	VGE	Replacement lamp Delta EA-3H-5 / 35W	50	T5	C
F980080	VGE	Replacement lamp Delta EA-3/4H-10 / 45W	50	T5	C
F980082	VGE	Replacement lamp Delta EA-4/4H-20 / 90W	50	T5	C
F980084	VGE	Replacement lamp Delta EA-4H-40 / 110W	60	T5	C
F980088	VGE	Replacement lamp BIO-UV 10 / 38W	50	T5	C
F980090	VGE	Replacement lamp BIO-UV 20 / 59W	50	T5	C
F980092	VGE	Replacement lamp BIO-UV 30 / 87W	50	T5	C
F980094	VGE	Replacement lamp BIO-UV 40 / 102W	60	T5	C



Pure pleasure

Swimming pools and spas are the perfect places for sports, fun and relaxing. Unfortunately they are also the perfect breeding place for bacteria, viruses and other primitive organisms. Clean swimming pool water doesn't have to mean high doses of chlorine. With UV treatment the chlorine level can be kept as low as possible, decreasing the unpleasant side effects of it. So you can fully enjoy every swim.

The clear choice

Our UV-C lamps significantly reduce the required concentration of chemicals needed to keep the pool clean. So there's no red eyes or skin irritations to worry about. Also unpleasantly intense chlorine aromas that affect hair and skin are avoided, making UV-C treated pools the preferred choice with swimmers.

Pure innovation

With a long and reliable lifetime, low energy and maintenance costs and high end of life output, Philips UV-C lamps provide



up to 12,000 hours of clean pool water. And with very low levels of mercury, they're clearly better for the environment when they're disposed of.

You're safe with us

Philips has been lighting your world for more than 100 years. Our comprehensive range of UV-C solutions covers water, air and surface disinfection using low and medium pressure mercury lamps.

innovation  you

To find out more dive into our website at
www.philips.com/uvpurification

PHILIPS

POND EQUIPMENT AND SUPPLIES

THREADED TANK CONNECTOR

Threaded tank connectors with rubber ring and nut.



Item No.	Type	Size	Box
7105510	Threaded Tank Connector	Ø 40 mm	100 pcs.
7105512	Threaded Tank Connector	Ø 50 mm	100 pcs.
7105514	Threaded Tank Connector	Ø 63 mm	100 pcs.
7105516	Threaded Tank Connector	Ø 75 mm	100 pcs.
7105518	Threaded Tank Connector	Ø 90 mm	100 pcs.
7105520	Threaded Tank Connector	Ø 110 mm	48 pcs.

TANK CONNECTOR


Straight connector for PVC solvent pipes.
Including flange and screws.



Item No.	Type	Size	Box
7105459	Tank Connector	Ø 40 mm	108 pcs.
7105469	Tank Connector	Ø 50 mm	108 pcs.
7105479	Tank Connector	Ø 63 mm	75 pcs.
7105481	Tank Connector	Ø 75 mm	40 pcs.
7105489	Tank Connector	Ø 90 mm	30 pcs.
7105499	Tank Connector	Ø 110 mm	24 pcs.
7105555	Radial Tank Connector for a round surface	Ø 110 mm	24 pcs.

BOTTOM DRAIN AND AERATED BOTTOM DRAIN

High quality bottom drain 110 mm outlet. The aerated bottom drain 110 mm has a rubber membrane on top. When an air pump is connected the air bubbles will cause an optimal circulation in the water.



Item No.	Type	Size
5905010	Bottom Drain 110 mm	Ø 110 mm
5905012	Aerated Bottom Drain	Ø 110 mm & 25 mm

POND EQUIPMENT AND SUPPLIES

SLIDE VALVE

Xclear slide valves are rectilinear valves which can be used to temporarily block the admission of water flow in a low pressure circuit. Mainly used for on/off waste valves in filters, to separate your filter from the water column or to shut off the water flow when required.



BENEFITS

- Unrestricted flow.
- Quick opening/closing.
- Simple and trouble-free operation.
- Solid cement socket ends.



Item No.	Type	Size	Box
7100017	Slide valve	Ø 40 mm	120 pcs.
7100019	Slide valve	Ø 50 mm	60 pcs.
7100022	Slide valve	Ø 63 mm	48 pcs.
7100025	Slide valve	Ø 75 mm	30 pcs.
7100023	Slide valve (Stainless Steel Blade)	Ø 90 mm	12 pcs.
7100024	Slide valve (Stainless Steel Blade)	Ø 110 mm	12 pcs.
7100026	Slide valve	Ø 160 mm	4 pcs.

PRE-FILTER

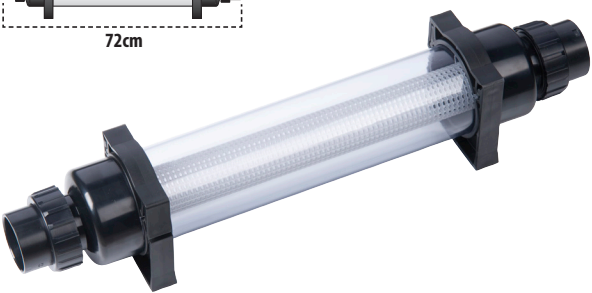


Ø 25/32/40/
50/63 mm



The pre-filter provides you an additional tool to keep your pond clean. The pre-filter ensures that larger pollutants in the pond water, such as leaves, small branches and larger algae particles are collected before they are caught up in the pump or in the filter.

BENEFITS

- Prevention that larger particles will clog up or overload the filter.
- Protects the lifespan of the pond pump.
- Transparent housing; easy to see when it requires cleaning.

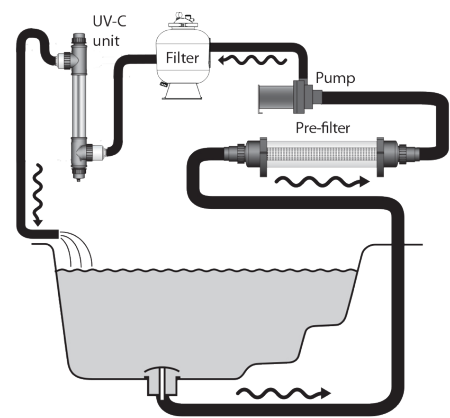

Item No.	Type	Max. flow	Max. pressure	Size
5053029	Pre-filter	25m³/h	2 bar	Ø110 mm x 720 mm

XCLEAR FISH FEEDER



SMALL QUANTITIES
CAN BE DOSED,
LEAVING NO
UNNECESSARY
POLLUTION

Due to its 3-button controller the Xclear Fish Feeder is very easy to program and operate. Using the Xclear automatic fish feeder will get the most out of your fish by always giving them the correct amount of food. This results in optimal growth and a more beautiful colour pattern for fish, such as koi. Also suitable for fish farms, control several feeders simultaneously by external automation.

OPERATION

- Very easy 3-button operation and programming.
- Configure the quantity of food by setting the required dispensing time per feeding from 0 to 600 seconds.
- Easy-to-set automatic feeding times.
- Food container for 7 liters of food.
- With 9 meters of electric cable.
- Can feed from 1 to 24 times a day.

BENEFITS

- No unnecessary pollution of the water.
- The filter is less likely to become clogged by food residue.
- Healthier for your fish.
- Suitable for pellet sizes between 2 and 9 mm.
- Labour-saving.
- External automation possible for one or more feeders.
- Including installation bracket.
- Made in the Netherlands.



Item No.	Type	Connection	Box
6051800N	Automatic Fish Feeder	220V	4

POND EQUIPMENT AND SUPPLIES

PROFIHEATER



The Xclear ProfiHeater is a professional stainless steel pond heater.

To raise the temperature of 1m³ water in 1 hour by 1°C requires about 1.000 kcal. This formula is only an indication, as the temperature also depends on surface area and any insulation that may be present. All models have been fitted with an adjustable thermostat that can be regulated up to 40°C. The heating element with the temperature probe, as well as the inside of the casing are made of high-quality stainless steel. ProfiHeaters can be connected using pond tubing or PVC tubing. Including fittings. It is advised to use a flow switch to prevent overheating of the unit at insufficient water flow.

Item No.	Type	Consumption	Max. Flow	Pond size
6900455	ProfiHeater 1 kW (860 kcal/h)	1000 Watt	20.000 L/h	5.000 L
6900456	ProfiHeater 2 kW (1720 kcal/h)	2000 Watt	20.000 L/h	10.000 L
6900457	ProfiHeater 3 kW (2580 kcal/h)	3000 Watt	20.000 L/h	15.000 L

ANTI ALGAE COPPER ELECTROLYZER



An ideal and effective method against (blanket)weed. The Copper Electrolyzer is installed before the pond return inlet. The pond water flows through the Copper Electrolyzer unit. A copper unit, or Electrolyzer, is positioned within the housing, and the copper unit discharges a minimal amount of copper ions into the water flowing through the housing. These copper ions (Cu2+) in the water have a positive charge and attach to and destroy the cell walls of algae, bacteria, viruses and other primitive organisms. As the cell wall is thereby damaged, these organisms are no longer able to take up any nutrients, and are therefore unable to multiply. The process of applying a positive charge to copper is called copper electrolysis. Inlet/outlet: Ø50 mm. PLEASE NOTE: (too much) copper is harmful for fish!

Item No.	Type	Size	Max. Dosage
3300029	Copper Electrolyzer	50 mm	0,7 ppm

STATIC MIXER



Static Mixer



Static Mixer Union

IMPROVED
DESIGN

Using the Static Mixer results in a proper distribution of oxygen in your water with low hydrostatic pressure. By improving the design the water is mixed even better, leading to the desired results!

OPERATION

The water together with air is divided in the static mixer, resulting in optimal mixing. The water and air passes through the PVC vanes and the air (possibly in combination with ozone) is quickly and efficiently mixed with the water. Due to the relatively low pressure loss, an energy-efficient pump can be used.

BENEFITS

- NEW design
- Easily connects to filter- or plumbing system.
- Extended mixing surface.
- Corrosion resistant.
- Including air inlet.
- Also possible to use the mixer in a low-pressure system, using an energy-efficient pump.
- Also suitable for saltwater.



PVC

Item No.	Type	Size
4800016	Static Mixer Ø 75 mm	75 mm
4800030	Static Mixer Union Ø 75 mm	75 mm

FLOW SWITCH PLUS

The Flow Switch Plus is the ideal protection for an electrical device in your pond installation. At insufficient water flow the Flow Switch Plus will turn off the connected device (e.g. a UV-C disinfection system).

- Prevents damage caused by running dry of devices rated at up to 10 amps.
- Easy installation thanks to the compact design.
- Easy to combine.
- Easy to integrate in an existing piping system, because of the special tee fitting.

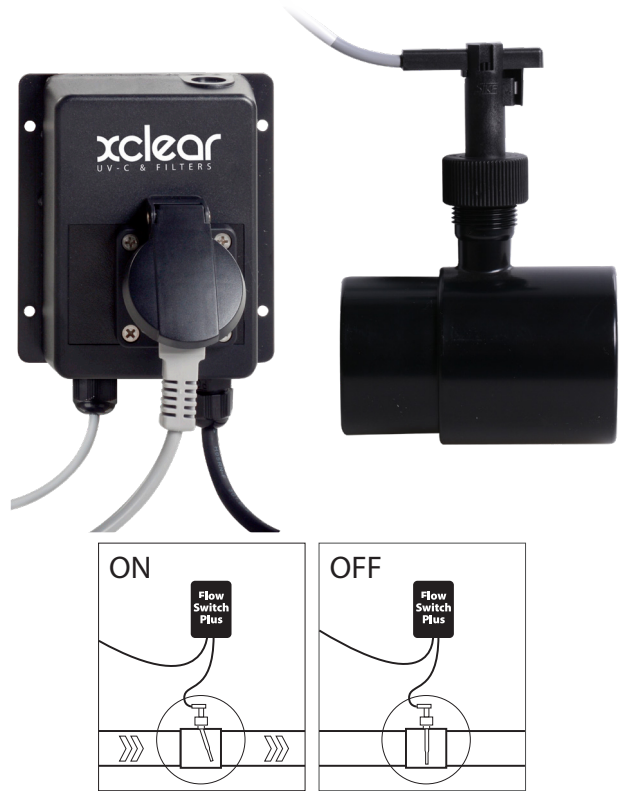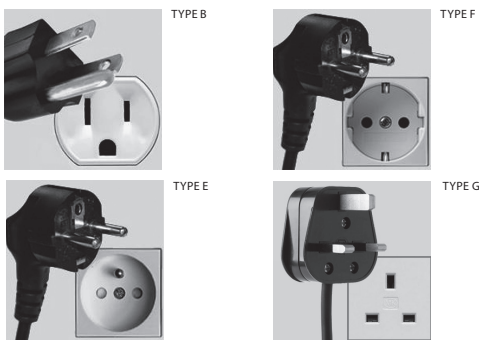

Item No.	Type	Connection
5056581	Flow Switch Plus 120 V (type B)	2"
5056585	Flow Switch Plus 230 V (type E)	63 mm
5056577	Flow Switch Plus 230 V (type F)	63 mm
5056589	Flow Switch Plus 230V (type G)	2"

BIO BALLS

High quality Bio Balls with a unique shape for biological filtration and a better water partition (trickle filters). High quality materials for long life span. Various sizes, specially made for pond use. Total surface: 8797mm², protected surface: 7037 mm².



Item No.	Type	Content
4902021	Bio Balls Container	5 liter
4902611	Bio Balls Bag	10 liter
4902017	Bio Balls 30 mm big bag	(± 72.000 pieces)

BIO BLOCKS

Useful bacteria growing on the huge surface area provided by these filter elements, converts harmful toxic fish wastes into relatively harmless by-products which are then removed by the plants or water changes. Size: Ø50 mm, height: 29 mm, total surface: 18897mm², protected surface: 11338 mm².



Item No.	Type	Content
4902613	Bio Blocks Bag	10 L (± 90 pcs.)
4902629	Bio Blocks Bag	25 L (± 225 pcs.)
4902010	Bio Blocks Bag	± 500 pcs.
4902015	Bio Blocks Bag	± 2.000 pcs.

PROMOTIONAL ACTIVITIES

XCLEAR PROMOTIONAL ACTIVITIES SUPPORT

At VGE B.V., we realize it's not always easy for wholesalers to convince (potential) customers of new technologies and the latest products they have in stock. New and improved technologies emerge at a high pace. It can be difficult to stay up-to-date of the latest innovations of UV-C pond disinfection systems and pond supplies - let alone convince customers why they should buy them. That's why B.V. came up with Marketing Packages.

To fully prepare for the upcoming pond season and to support promotional activities, Xclear provides her customers with Marketing Packages. Customers receive the Xclear catalogue, UV-C marketing pack and the Pond supplies marketing pack. In the files they can find:

- Brochures
- Catalogue text and pictures in order to update catalogue/website content
- Product flyers to share with the public
- Product sheets to understand the technology
- The 6 benefits of UV-C disinfection systems for ponds
- Spare part overviews
- Video's

XCLEAR ACCELERATES YOUR DELIVERY TIME

As a professional in the pond industry, your challenge is to deliver products in time, all the time. Your challenge is to minimize the time between receipt of a customer order and receipt of the goods from the manufacturer or supplier. That's why at Xclear, our goal is to accelerate your delivery time and therefore your customer service. One of the top priorities is the continuous increase of our performances. One way to enable this is by constantly improving our time to market. This way you are able to:

- Control your planning more adequately
- Manage your stock better

Currently, we deliver to more than 70 countries worldwide. As transparency is highly valued with Xclear, appointments considering delivery and service are always predetermined.

Our service benefits are clear, now it's time to share them with the world! If you require any other information, knowledge of our products or other promotional material, simply contact us and let us know.

'If you are curious how an informative seminar from a UV-C specialist can benefit the sale of your product assortment, please don't hesitate to contact us.'



PRIVATE LABEL TERMS AND CONDITIONS VGE B.V.

Your product assortment can be easily extended with your own UV-C equipment. Your own packing, your own commercial appearance and your own brand development!

OPTIONS

Private label basic package:

- Blank packing with your own designed product sticker
- Neutral manual
- Your own product labels
- Standard lamp and spare parts

Basic package can be extended with:

- Full colour packing
- Customized product colour
- Your own manual
- Private label UV-C lamp (fitting colour / logo)
- Private label UV-C lamp (with own fitting)
- Other wishes negotiable

INVESTMENT

The customer must make a down payment for the purchase of deviant parts and packaging, depending on the chosen options. This down payment will be deducted from the product retail price. The investment will be fully settled after the complete purchase of the private label products has been made. This means that there will not be any additional costs.


MINIMUM PURCHASE

The minimum purchase per order depends on the device type and the chosen package. The minimum order and purchase schedule is to be agreed on.

UV-C LAMP CHOICE

The choice of the UV-C lamp for the device is very important for future aftersales. A UV-C lamp needs to be changed regularly. By choosing a UV-C lamp with a unique fitting, you assure yourself with returning revenue and new sales opportunities. You will be the only retailer that sells the lamp. It is possible to choose for a UV-C lamp with a unique fitting or fitting colour and it is also possible to have your logo printed on the lamp.


' Your own private label UV-C units '

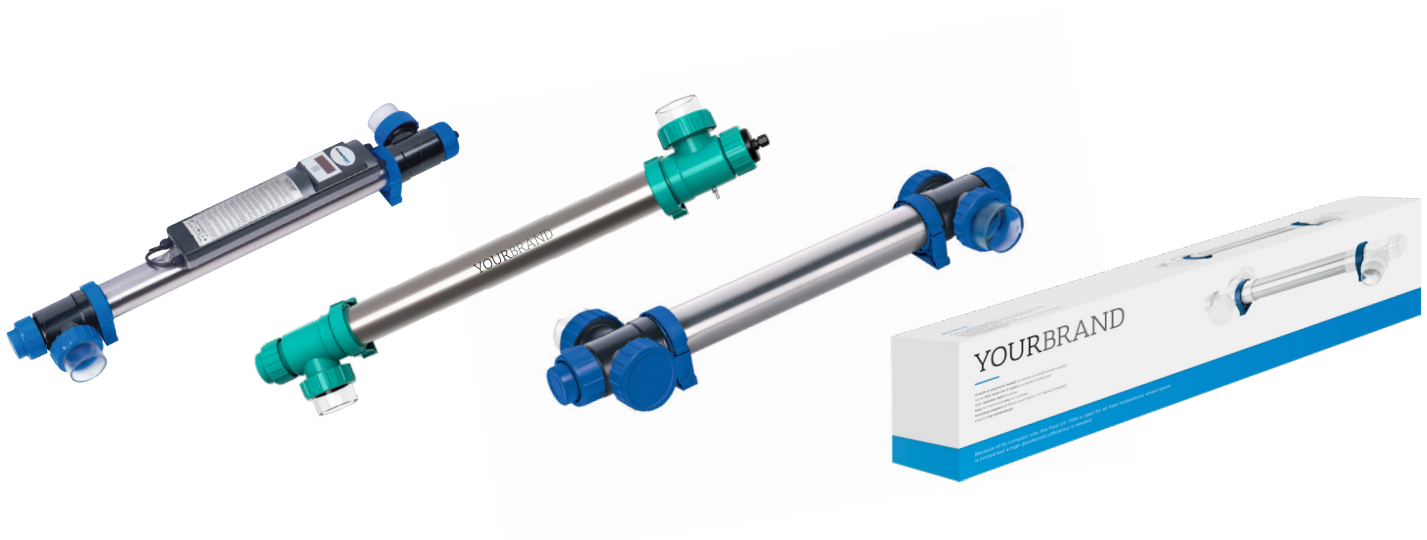




SPARE PARTS

ECONOMY UV-C

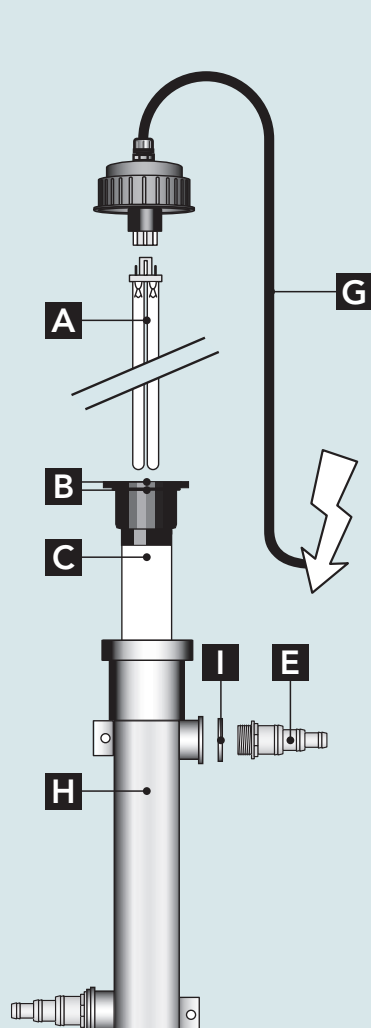

Item No.	Type	Part
XE01052	Economy UV-C 5 Watt	
XE01092	Economy UV-C 9 Watt	
XE01112	Economy UV-C 11 Watt	
3903006	PL-S Bulb 5 Watt Economy Xclear	A
3903011	PL-S Bulb 9 Watt Economy Xclear	A
3903021	PL-S Bulb 11 Watt Economy Xclear	A
3101112	Quartz sleeve 146 x 40 mm 5 Watt	C
3101113	Quartz sleeve 215 x 40 mm 9 Watt	C
3101114	Quartz sleeve 277 x 40 mm 11 Watt	C
3902041	O-ring 56 x 3 mm UV-C	B
EP011001	Electrics Economy UV-C 5/9/11 Watt	G
3903571	Housing Economy UV-C 5 Watt	H
3903572	Housing Economy UV-C 9 Watt	H
3903573	Housing Economy UV-C 11 Watt	H
7100543	Universal adaptor 1" 25 x 20 x 15 mm clear	E
3902040	Sealing ring 1"	I


ULTRAFLEX UV-C

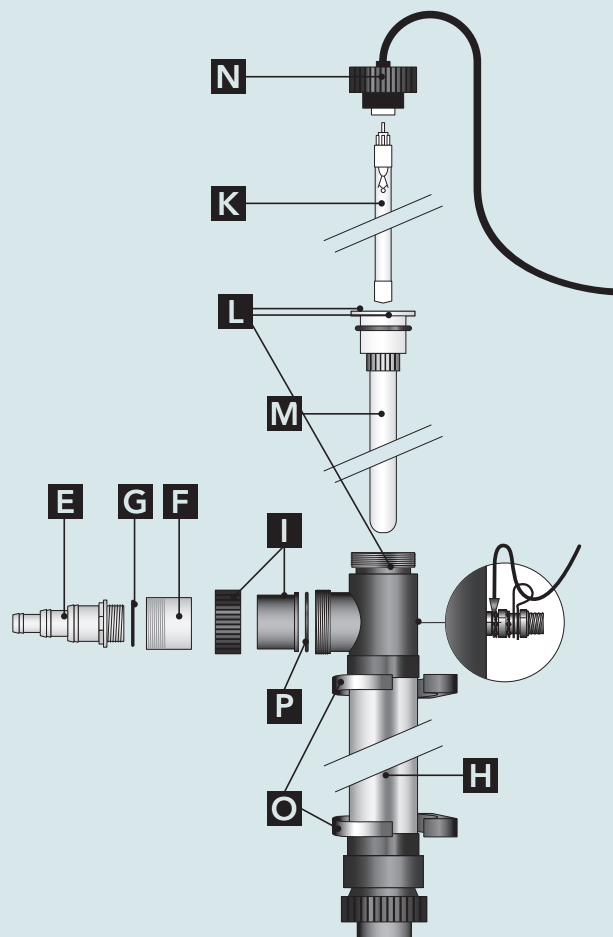

Item No.	Type	Part
XE03752	Ultraflex UV-C 75 Watt T5	
F980079BU	T5 lamp 75 Watt for Tech/Flex UV-C	K
QG017	Quartz sleeve 695 x 25 mm 40/75 Watt	M
3902041	O-ring 56 x 3 mm UV-C	L
EP075017	Electrics Ultraflex UV-C 75 Watt	N
3903752	Housing Ultraflex UV-C 75 Watt	H
E800940	3-Way connection 63 mm black	I
E800941	O-ring for 3-way connection 63 mm	P
F990115	Reduction piece 1,5" wire x 63 out 50 in	F
3902046	Sealing ring 1½"	G
E801128	Universal adaptor 1½" 40x32x25mm clear	E
E801107	Tube clip 75 mm PP Black	O


SPARE PARTS

PROFESSIONAL UV-C

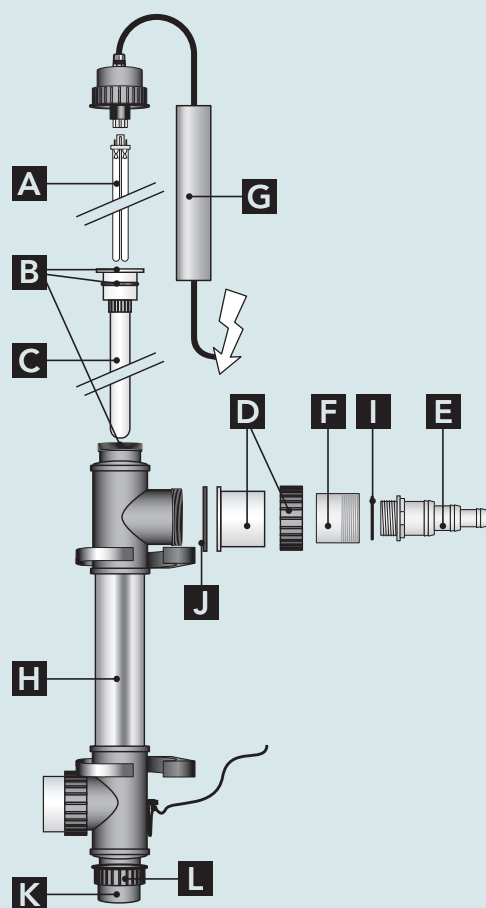


Item No.	Type	Part
XH01182	Professional UV-C 18 Watt	
XH01362	Professional UV-C 36 Watt	
XH01552	Professional UV-C 55 Watt	
3903030	Philips PL bulb 18 Watt	A
3903040	Philips PL bulb 36 Watt	A
3903050	Philips PL UVC bulb 55 Watt	A
QG008	Quartz sleeve 280x44 mm 18 Watt	C
QG009	Quartz sleeve 461x44 mm 36 Watt	C
QG022	Quartz sleeve 603x44 mm 55 Watt	C
3902041	O-ring 56 x 3 mm UV-C	B
EP036001	Electrics 18 / 36 Watt Professional	G
EP055001	Electrics 55 Watt Professional	G
3903673	Housing 18 Watt Professional UV-C	H
3903674	Housing 36 Watt Professional UV-C	H
3903675	Housing 55 Watt Professional UV-C	H
E800940	3-way connection 63 mm black	D
E800941	O-ring for 3-way connection 63 mm	J
F990115	Reduction piece 1,5" wire x 63 out 50 in	F
3902046	Sealing ring 1½"	I
E801128	Universal adaptor 1½" 40 x 32 x 25 mm clear	E
4800069	Replacement set for housing Professional UV-C	-
3901045	Nut 70mm x 33.5mm black	L
F990011BU	End cap black	K

FLEX UV-C

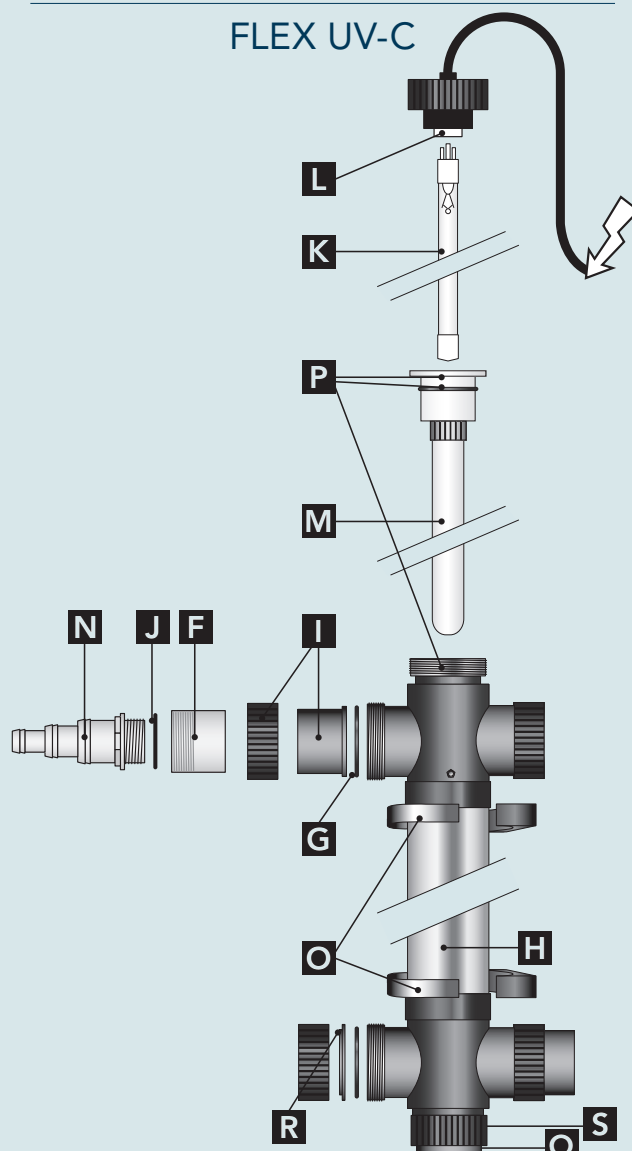


Item No.	Type	Part
XE04402	Flex UV-C 40 Watt	
XE04752	Flex UV-C 75 Watt	
F980078BU	Lighttech T5 bulb red base 40 Watt	K
F980079BU	Lighttech T5 bulb red base 75 Watt	K
QG017	Quartz sleeve 695 x 25 mm 40/75W	M
3902041	O-ring 56 x 3 mm UV-C	P
EP040012	Electrics UV-C 40 Watt	L
EP075017	Electrics UV-C 75 Watt	L
F990175BU	Housing Flex UV-C 40/75 Watt	H
E800940	3-way connection 63 mm black	I
E800941	O-ring for 3-way connection 63 mm	G
F990115	Reduction piece 1,5" wire x 63 out 50 in	F
3902046	Sealing ring 1½"	J
E801128	Universal adaptor 1½" 40 x 32 x 25 mm clear	N
E801107	Tube clip 75 mm PP Black	O
F990196BU	Closing lid Flex UV-C	R
3901045	Nut 70mm x 33.5mm black	S
F990011BU	End cap black	Q

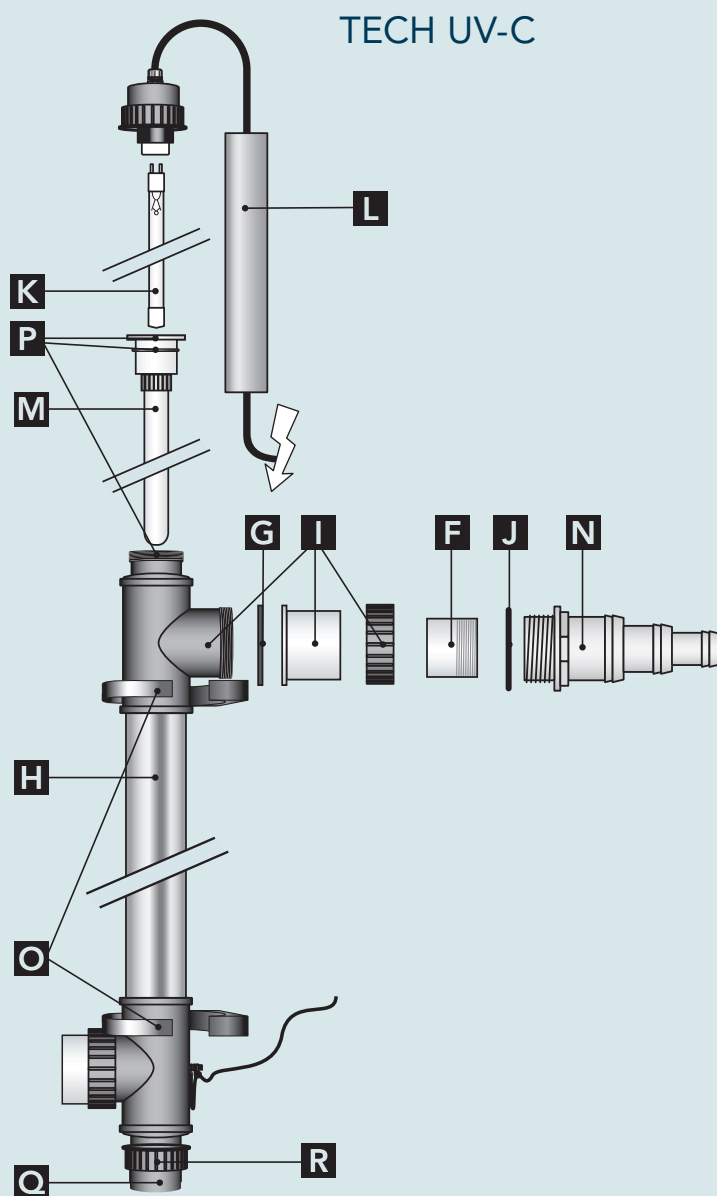

Item No.	Type	Part
XE05402	Tech UV-C 40 Watt	
XE05752	Tech UV-C 75 Watt	
F980078BU	Light Tech T5 bulb red base 40 Watt	K
F980079BU	Light Tech T5 bulb red base 75 Watt	K
QG017	Quartz sleeve 695 x 25 mm 40/75W	M
3902041	O-ring 56 x 3 mm UV-C	P
EP040012	Electrics UV-C 40 Watt	L
EP075017	Electrics UV-C 75 Watt	L
F990165BU	Housing Tech UV-C 40/75 Watt	H
E800940	3-Way connection 63 mm black	I
E800941	O-ring for 3-way connection 63 mm	G
F990115	Reduction piece 1,5" wire x 63 out 50 in	F
3902046	Sealing ring 1½"	J
E801128	Universal adaptor 1½" 40 x 32 x 25 mm clear	N
E801107	Tube clip 75 mm PP Black	O
3901045	Nut 70mm x 33.5mm black	R
F990011BU	End cap black	Q


SPARE PARTS

JUMBO TECH UV-C

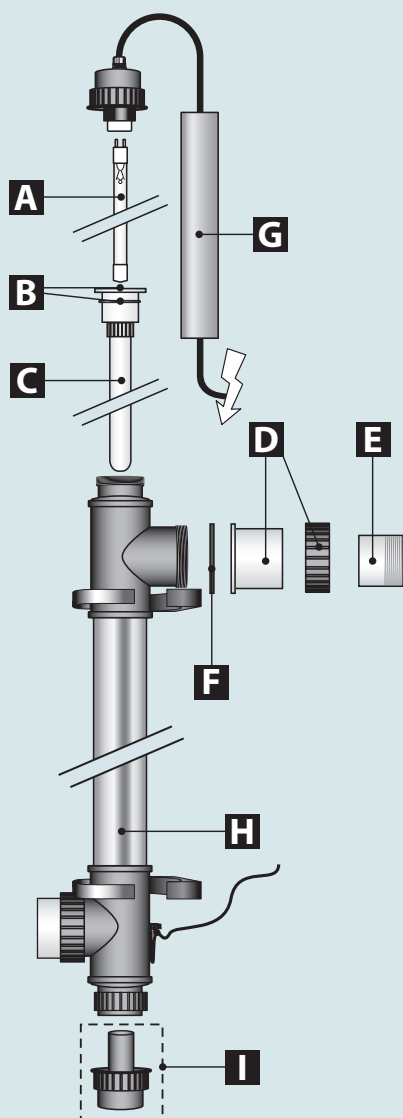


Item No.	Type	Part
XH04402	Jumbo Tech UV-C 40 Watt	
XH04752	Jumbo Tech UV-C 75 Watt	
F980002	Lighttech T5 bulb orange base 40 Watt	A
F980004	Lighttech T5 bulb orange base 75 Watt	A
QG015	Quartz sleeve 933 x 25 mm 40/75 Watt	C
3902041	O-ring 56 x 3 mm UV-C	B
EP040001	Electrics Tech UV-C 40 Watt	G
EP075001	Electrics Tech UV-C 75 Watt	G
3903788	Housing Jumbo Tech UV-C 40/75 Watt	H
E800940	3-way connection 63 mm black	D
E800941	O-ring for 3-way connection 63 mm	F
F990115	Reduction piece 1,5" wire x 63 out 50 in	E
3901045	Nut 70mm x 33.5mm black	J
F990011BU	End cap black	I

130 WATT AMALGAM UV-C WITH FLOW SWITCH

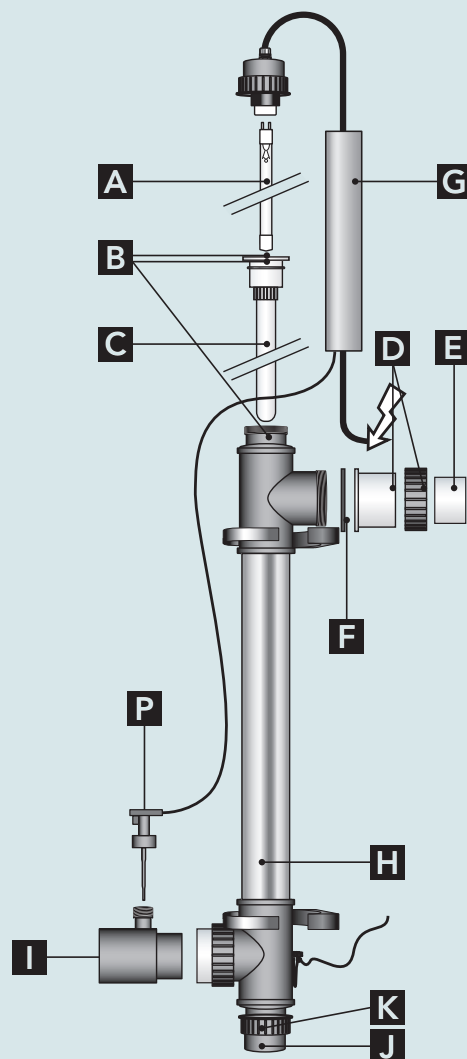


Item No.	Type	Part
XH06132	130 Watt Amalgam UV-C stainless steel with flow switch	
E800904	Philips TUV Bulb 130 Watt Amalgam	A
QG012	Quartz sleeve 920 x 31 mm 130 Watt	C
E800912	O-ring for quartz sleeve Jumbo UV-C	B
EP130001	Electrics 130 Watt Amalgam UV-C with flow switch	G
3903670	Housing for Amalgam UV-C 130 Watt	H
E800940	3-way connection 63 mm black	D
E800941	O-ring for 3-way connection 63 mm	F
F990115	Reduction piece 1,5" wire x 63 out 50 in	E
B290020	Reduction piece 63/63 for flow switch	I
B290021	Reduction piece 60/60 with 3/4" screw wire for flow switch amalgam	I
E801220	Flow Switch	P
3901045	Nut 70mm x 33.5mm black	K
F990107	End cap amalgam black	J

INOX UV-C

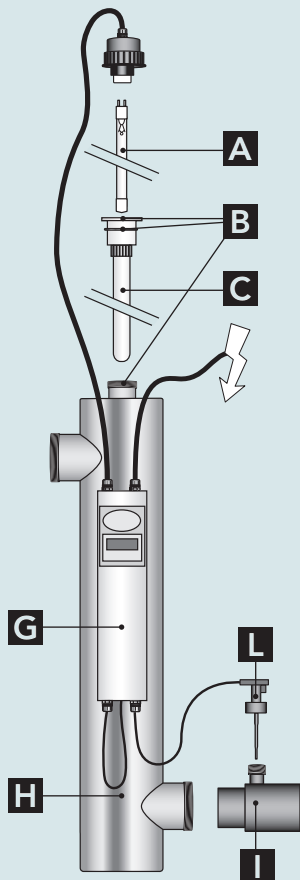

IMMERSION UV-C

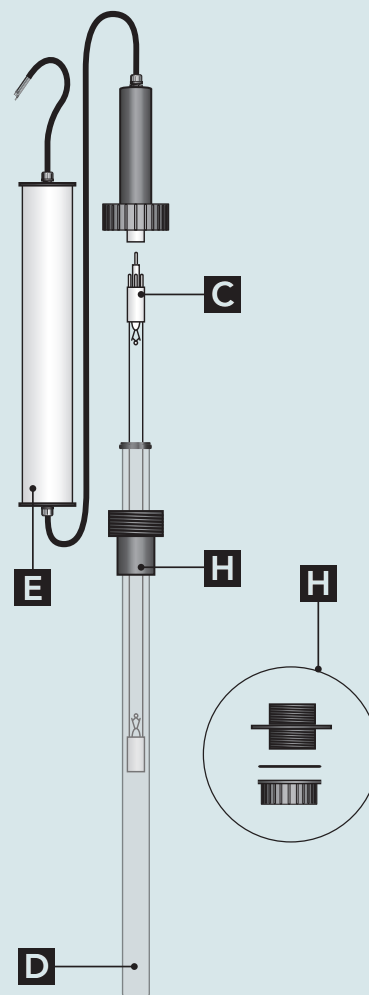


Item No.	Type	Part
XP02752	Inox UV-C 75 Watt T5	
XP02132	Inox UV-C 130 Watt Amalgam	
E800902P	Philips TUV 36T5 HO4P-SE 75 Watt	A
E800904	Philips TUV lamp 130 Watt Amalgam	A
QG015	Quartz sleeve Inox UV-C 75 Watt	C
QG012	Quartz sleeve Inox UV-C 130 Watt	C
E800912	O-Ring for quartz sleeve (3 pieces)	B
EP075005.1	Electrics Inox UV-C 75 Watt Xclear	G
EP130004.1	Electrics Inox UV-C Amalgam Xclear	G
B212002	Housing for Inox UV-C 75 / 130 Watt	H
B290020	Reduction piece 63/63 3/4" wire for flow switch Amalgam	I
B290021	Reduction piece 60,5/60,5 3/4" wire for flow switch Amalgam	I
E801220	Flow switch complete	L

Item No.	Type	Part
XP01402	Immersion UV-C 40 Watt	
XP01752	Immersion UV-C 75 Watt	
XP01402.1	Immersion UV-C 40 Watt Amalgam	
XP01802	Immersion UV-C 80 Watt Amalgam	
F980078BU	T5 bulb red base 40 Watt	C
F980079BU	T5 bulb red base 75 Watt	C
4800070AM	T5 bulb 40 Watt Amalgam	C
4800082AM	T5 bulb 80 Watt Amalgam	C
3100837	Quartz sleeve immersion 40/75 Watt & 80 Watt Amalgam	D
3100847	Quartz sleeve immersion 40 Watt amalgam	D
3100835	Electrics Immersion UV-C 40 Watt	E
3100836	Electrics Immersion UV-C 75 Watt	E
3100842	Electrics Immersion UV-C 40/80 Watt Amalgam	E
3900684	External threaded socket for quartz glass Immersion	H
7201269	Tank connector 1/2"	H


SPARE PARTS

MODULE UV-C

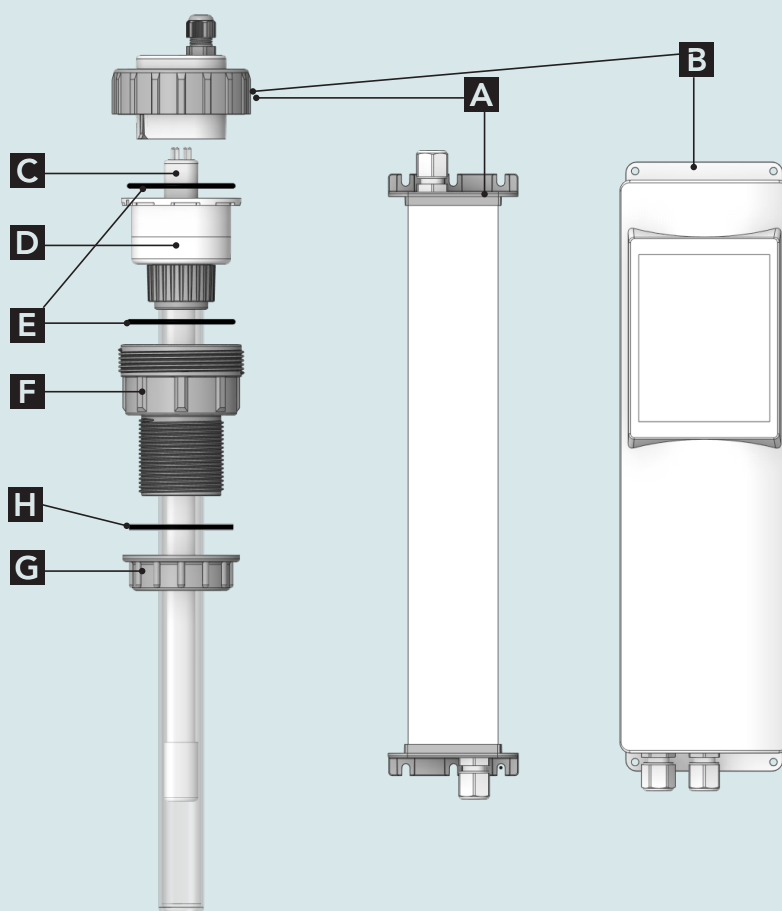


Item No.	Type	Part
XP08402	Xclear Module UV-C 40W Amalgam	
XP08802	Xclear Module UV-C 80W Amalgam	
XP09402	Xclear Module UV-C 40W Amalgam Signal	
XP09802	Xclear Module UV-C 80W Amalgam Signal	
EP080013	Electrics for Xclear Module UV-C 40/80W Amalgam	A
EP080012	Electrics for Xclear Module UV-C 40/80W Amalgam Signal	B
3903110	Lamp VGE T5 40W Amalgam Base C	C
3903111	Lamp VGE T5 80W Amalgam Base C	C
QG104	Quartz Glass VSC 667 x 25 mm 80W AM	D
QG018	Quartz Glass VSC 400 x 25 mm 40W AM	D
3902041	O-ring 56 x 3	E
F990713	Feed-through adapter	F
7107813	Counter nut black	G
3902046	Flat gasket	H

PROFESSIONAL UV-C Ø110 MM

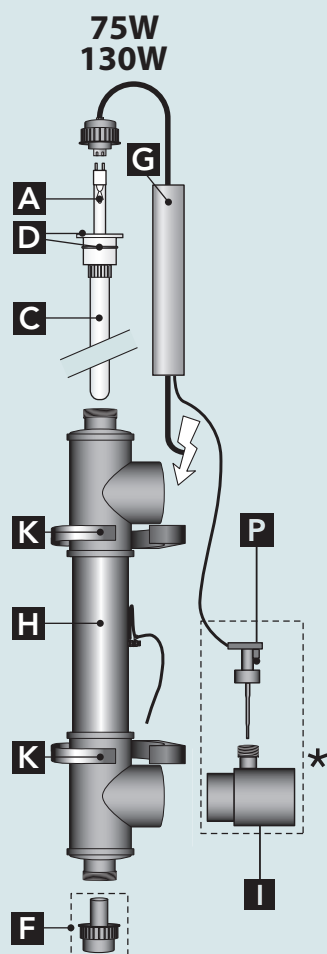

Item No.	Type	Part
XH07752	Professional UV-C Ø 110 T5 75 Watt	
XH07132	Professional UV-C Ø 110 Amalgam 130 Watt*	
E800902P	Philips TUV 36T5 HO4P-SE 75 Watt	A
E800904	Philips TUV Bulb 130 Watt Amalgam	A
QG015	Quartz sleeve 933 x 25 mm 40/75 Watt	C
QG012	Quartz sleeve 920 x 31 mm 130 Watt	C
3902041	O-Ring 56 x 3 mm UV-C	D
EP075002	Electrics Jumbo UV-C 75 Watt	G
EP130001	Electrics 130 Watt Amalgam UV-C + flow switch	G
3903671	Housing Professional UV-C Ø110 75 Watt T5	H
3903672	Housing Professional UV-C Ø110 130 Watt Amalgam	H
F990107	End cap with lamp retainer 32 mm	F
B290020	Reduction piece 63/63 for flow switch	I
E801220	Flow Switch for 130 Watt Amalgam	P
4800079	Replacement for housing 130 Watt Amalgam	-
E801146	Mounting bracket 110 mm black	K


COPPER ELECTROLYZER

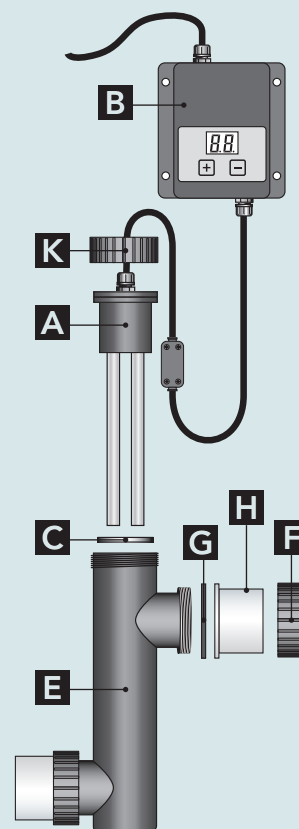

Item No.	Type	Part
33000029	Copper Electrolyzer	
B290076	Control Box for Copper Electrolyzer	B
3300027	Housing Xclear Anti Algae Copper Electrolyzer	E
B290029	Copper unit for Blue Lagoon UV-C Ionizer	A
3901045	Nut 70mmx33.5mm BLACK	K
E801509	O-Ring for 3-way connection (1 piece)	G
3902068	O-ring 56x3 UV-C housing/glass SIL	C
B220013	Nut ABS black	F
E801136	Glue socket 50mm transparent ABS	H

SPARE PARTS

AOP COMPACT OZONE & UV-C HP

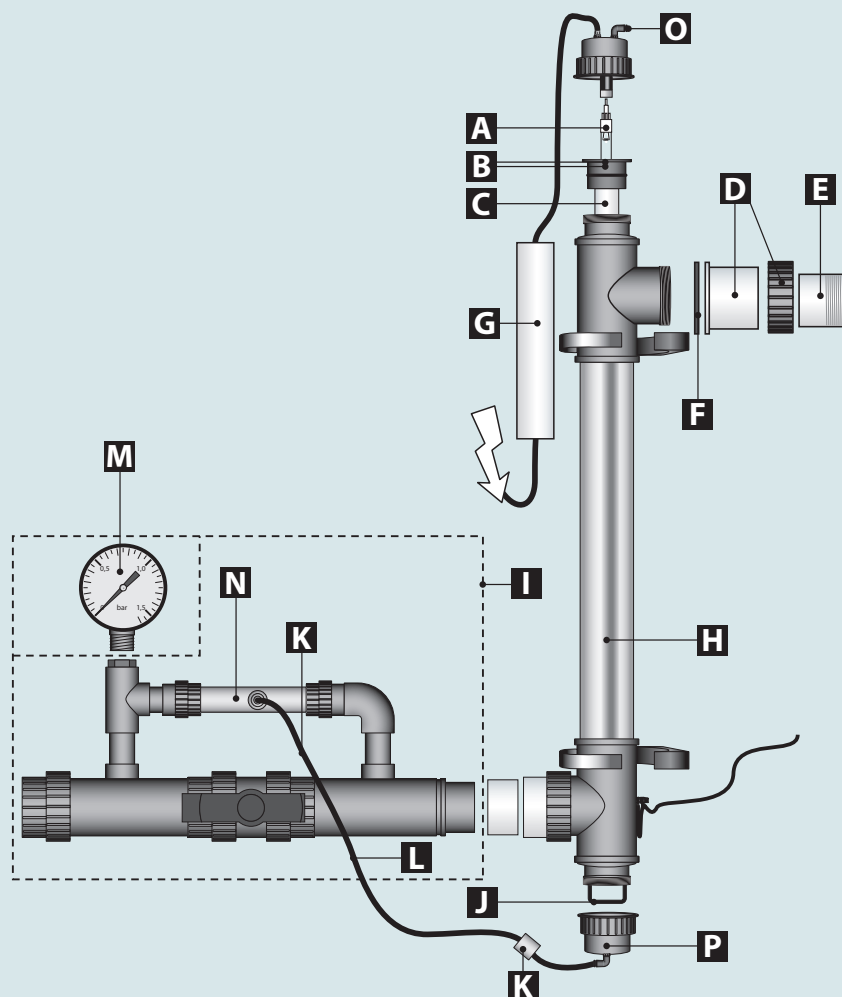

Item No.	Type	Part
XH09752	AOP Compact Ozone & UV-C HP	
4800033	Ozone bulb Low/High pressure 75 Watt	A
QG025	Quartz sleeve 886 x 31 mm 75 Watt ozone	C
3902106	O-ring for quartz sleeve	B
EPOH001	Electrics Ozone Redox Turbo3 high UV-C 75 Watt	G
4800027	Housing for Ozone Redox	H
E800940	3-way connection 63 mm black	D
E800941	O-ring for 3-way connection 63 mm	F
F990115	Reduction piece 1,5" wire x 63 out 50 in	E
4800116	Handgrip complete for Ozone	J
4800076	End cap for Ozone with 1 air plug	P
3901045	Nut 70 x 33,5 mm for ozone black	S
3902095	O-ring Viton 60 x 3 mm Viton R	T
4800015	Check valve Viton (Ozone resistant)	K
4800020	Hose 8 mm black for Ozone UV-C	L
4800068	Venturi unit for Ozone high pressure UV-C	I
4800065	Venturi 3/4" for Ozone high pressure	N
4800057	Manometer for Ozone high pressure	M
4800005	Air plug rectangular for Ozone UV-C	O

xclear
U V - C SOLUTIONS





VGE B.V.
Nieuwe Eerdsebaan 26
5482 VS Schijndel
The Netherlands

Tel. +31(0) 88 222 1999
info@vgebv.nl
www.vgebv.com
www.xclear.nl

15102021

