


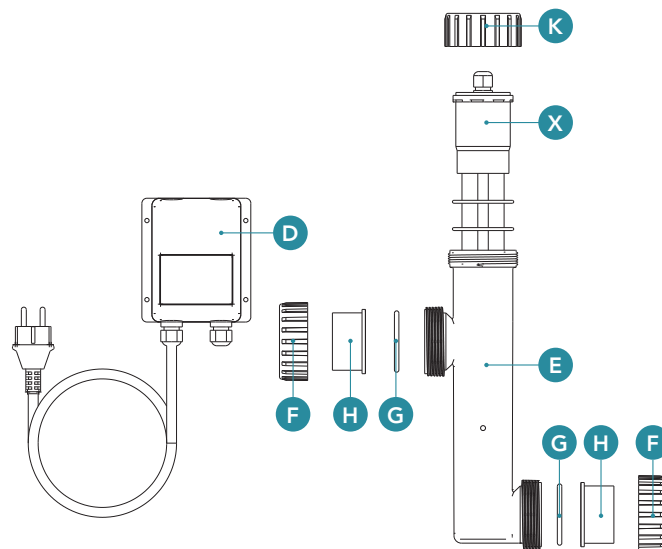

- *Safety and Professional Use:*
- *Installation should be part of a professional application or integrated with other equipment; Before use, the installer/user must verify that the product complies with the latest European UV-C standards*

Technical Specifications

Art. number	3300029
EAN	8714404039093
Max. flow	13 m ³ /h
Max. pressure	1 bar
Diameter unit Ø	59 mm
Length unit	340 mm
Diameter in-outlet Ø	48/50 mm
Housing material	PC/ASA
Operating environment ballast temperature	1-40 °C

Spare parts

C	3902041	O-ring NBR 56x3
D	B290076	Control Box for Copper Electrolyzer
E	3300027	Housing Xclear Anti Algae Copper Electrolyzer
X	B290029	Copper set base + cable connector
K	3901045	Nut 70 mm x 33.5 mm ABS black
H	E801136	Glue sock 50mm ABS Transparent
G	E801509	O-ring 3-way connection NBR 53x4,5
F	B220013	Nut ABS black

Advantages

Provides an effective, chemical-free solution for controlling blanket weed and improving overall pond water quality.

- Reduces the need for other water treatment (products)
- Keeps pond water more stable
- Designed for installation before the pond return inlet
- Inlet/outlet diameter Ø50 mm
- Efficient: applies a controlled positive charge, providing long-lasting protection against unwanted algae and pathogens.
- *Pending EU regulations or conditional approval, national regulations apply to the trade and use of copper-containing products. The copper used in these units complies with the REACH registration. It is the sole responsibility of the buyer to inform himself/herself about applicable local regulations regarding the use of (and trade in) copper for water disinfection.*