



Xclear Xpert Inox UV-C



Top view of the 2" male thread in-outlet

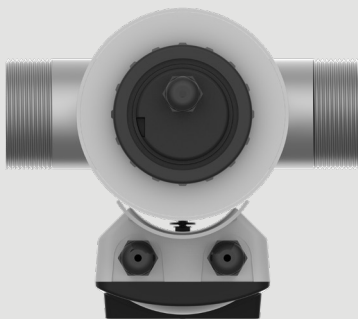

Flow switch included with 130 W model



Electrics with timer function

Advantages

Professional-grade disinfection to keep large ponds crystal-clear.

- Designed to fit seamlessly into large, professional filtration systems
- Complete 316L Stainless steel durable housing
- Standard equipped with flow switch for safe operation
- Integrated timer indicates when lamp replacement is needed
- Large chamber with a 114 mm diameter ensures long UV exposure time for cleaner and healthier water
- Handles up to 5 bar pressure for robust performance

	75 W	130 W Amalgam
Art. number	XP02752	XP02132
Type	75 W	130 W
EAN	8714404038539	8714404038546
Max. flow for 30 mJ/cm ²	18 m ³ /h	22 m ³ /h
Max. pressure	5 bar	5 bar
Diameter unit Ø	114 mm	114 mm
Length unit	100 cm	100 cm
Diameter in-outlet Ø	2" Male thr.	2" Male thr.
Housing material	316 L	316 L
Operating environment ballast temperature	1-40 °C	1-40 °C
Lifespan lamp	9.000 hours	12.000 hours
Timer	✓	✓
Flow switch	No	✓

PRO
ONLY

STAINLESS
STEEL

Spare parts

Available for:			75 W	130 W
A	E800902PAM	Lamp Philips TUV 36T5 75 W HO 4P-SE Base C AM Packed	•	
	E800904AM	Lamp Philips TUV XPT 130 W 4P-SE Amalgam Base E AM Packed		•
B	QG015	Quartz Glass VSC 933 x 25 mm 40/75/80 W AM	•	
	QG012	Quartz Glass VSC 920 x 30 mm 130 / 140 W AM		•
C	E800912	Set (3pcs) O-ring for quartz glass	•	•
D	EP075005.1	Electrics for Xclear UV-C Inox 75 W	•	
	EP130004.1	Electrics for Xclear UV-C Inox 130 W		•
E	B212002	Housing Inox UV-C	•	•
M	B290020	Reduction piece 63/63 mm 3/4" male threaded for flow switch		•
	B290021	Reduction piece 60.3/60.3 mm 3/4" male USA-UK threaded for flow switch		
U	B290131	Flow Switch 2 meter cable black		•

Optional Parts

V	SP0070	Clamp Saddle for Flowswitch 50mm x 3/4"
	SP0071	Clamp Saddle for Flowswitch 63mm x 3/4"
	SP0072	Clamp Saddle for Flowswitch 75mm x 3/4"

